




GRID LINEAR LIGHT MODULE

The Grid Linear Light Module contains a 4 ft. linear light fixture, which enables a precise and well-lit illumination. It can be used in a variety of applications from small offices to hospitality or lobby spaces. Used in combination with external lighting drivers and the Grid Multisensor Module these recessed spotlights are capable of dimming in response to daylight, occupancy/vacancy or other network commands.

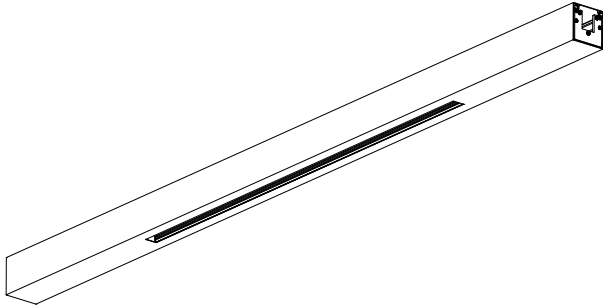

Product Features

- Modular mechanical and electrical connection to the Grid system
- Precise and well-lit illumination
- Reduced glare
- Dimmable from 0%, 5 – 100%
- Easy to install and maintain
- Straight module lengths only

Specifications

Module Style	Length	Width	Height	Weight
8 ft. section	92 in. [2337 mm]	4 in. [101.6 mm]	4 in. [101.6 mm]	21.2 lb [9.6 kg]

Module Finish

- Powder coat white, and black
- Anodized black, clear, champagne, light bronze, medium bronze, and dark bronze

Luminaire Dimensions

- Width: 2.0 in [51 mm]
- Length: 52.0 in [1320 mm]

Luminaire Finish

- Powder coat black or white

Construction

- Fixture Housing: Aluminum
- Module: Aluminum extrusion

Beam Angle	Luminaire Power	Maximum Current	Operating Voltage	Source Flux	Luminaire Flux	Max Value	Efficacy	UGR
20°	30 W	250 mA	26V	3500 lm	2600 lm	107 lm/W	1517.5 cd/klm	<5 (66) or <0 (46)

Light

- Adjustability: Fixed
- Light Distribution: Direct

Driver

- Sold separately

Color Temperature

- 3000K

CRI

- >80

Lamp Type

- LED

Storage Temp

- 10°C to 40°C [50°F to 104°F]

MacAdam

- 3

Certifications

- UL, CE, A++, IP20

Polar Curve

