


# Linear Light

The Linear Light is a low glare fixture which provides even illumination throughout a space. It can be used in a variety of applications including offices, hospitality or lobby spaces. Used in combination with the Node Multisensor, these Linear Lights are capable of dimming in response to daylight, space use, wall switch or network command.

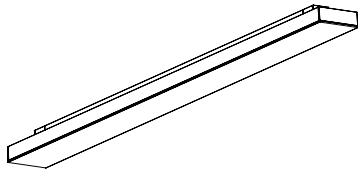

## Product Features

- Dimmable from 0%, 5-100%
- Easy to install
- Easy to maintain
- EEL Rating: A++
- L70 Lumen Maintenance: 50,000 hours

## Specifications

Mounting Style	Length	Width	Height
Recessed Channel (K4)	1154 mm / 45.40 in.	100 mm / 3.94 in.	58.5 mm / 2.30 in.
Flush Channel (K4)	1154 mm / 45.40 in.	100 mm / 3.94 in.	58.5 mm / 2.30 in.

### CRI

- >80

### Certification

- CE (Europe)
- ETL (USA)
- CSA (Canada)

### Construction

- Aluminum housing material

### Lamp Type

- LED


### Energy Consumption

- 20.90 kWh/1000h

### Drivers Available (Sold Separately)

- DALI (Europe-only)
- eldoLED SOLOdrive-365 (DALI-2 protocol)
- eldoLED SOLOdrive-366 (0-10V protocol)

### Polar Curve



Color Temp	Luminaire Power	Maximum Current	Nominal Voltage	Delivered Lumens	Source Lumens	Efficacy
3000 K	21.5 W	700 mA	30.7 V	2842 lm	2842 lm	132 lm/W
3500 K	21.5 W	700 mA	30.7 V	2918 lm	2918 lm	136 lm/W
4000 K	21.5 W	700 mA	30.7 V	2972 lm	2972 lm	138 lm/W