


Linear Light

The Linear Light is a low glare fixture which provides even illumination throughout a space. It can be used in a variety of applications including offices, hospitality or lobby spaces. Used in combination with the Node Multisensor, these Linear Lights are capable of dimming in response to daylight, space use, wall switch or network command.

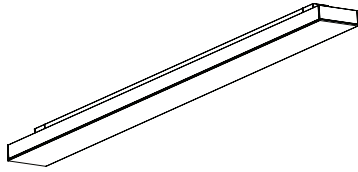

Product Features

- Dimmable from 0%, 5–100%
- Easy to install
- Easy to maintain
- EEL Rating: A++
- L70 Lumen Maintenance: 50,000 hours

Specifications

Mounting Style	Length	Width	Height
Recessed Channel (K4)	1154 mm/45.40 in.	100 mm/3.94 in.	58.5 mm/2.30 in.
Flush Channel (K4)	1154 mm/45.40 in.	100 mm/3.94 in.	58.5 mm/2.30 in.

UGR

- <19

CRI

- 80

Certification

- CE (Europe)
- ETL (USA)
- CSA (Canada)

Construction

- Aluminum housing material

Lamp Type

- LED

Energy Consumption

- 20.90 kWh/1000h

Drivers Available (Sold Separately)


- DALI (Europe-only)
- eldoLED SOLOdrive-365 (DALI-2 protocol)
- eldoLED SOLOdrive-366 (0-10V protocol)

Lens Type


- Standard
- High Uniformity

Polar Curve

Standard



High Uniformity



Visual Uniformity	Color Temp	Luminaire Power	Maximum Current	Nominal Voltage	Delivered Lumens	Source Lumens	Efficacy
Standard	3000 K	21.5 W	700 mA	30.7 V	2842 lm	2842 lm	132 lm/W
	3500 K	21.5 W	700 mA	30.7 V	2918 lm	2918 lm	136 lm/W
	4000 K	21.5 W	700 mA	30.7 V	2972 lm	2972 lm	138 lm/W
High Uniformity	3000 K	17.7 W	600 mA	29.5 V	2300 lm	2300 lm	130 lm/W
	3500 K	17.7 W	600 mA	29.5 V	2384 lm	2384 lm	135 lm/W
	4000 K	17.7 W	600 mA	29.5 V	2420 lm	2420 lm	137 lm/W